

**auratherm**<sup>®</sup>  
trapezium

Lot 20  
compliant

**AMBIENTE**

**AMBIENT HEAT · AMBIENT LIGHT**

## TRAPEZIUM ANTI-GLARE LED MIRROR RADIATOR

with OPTIONAL WIRELESS HEATER TIMER

**A©ID**<sup>®</sup>  
ANTI COPYING IN DESIGN

**BSRIA**  
Member

- The unique design of the TRAPEZIUM unit allows the light to bounce off the wall, therefore reducing eye strain caused by the direct LED source.
- Available in Powder Coated White RAL 9016. Other RAL colours, please phone for details.
- All units can be mounted vertically or horizontally giving you the option of both uplighting or sidelighting.
- Works with Wireless optional 4 hour timer.

1 x AUR 1500D/PC/IP44/MR/LED/V  
- Glass Mirror, Powder Coated White Body  
- 500x1500x44mm


### RADIATOR KEY FEATURES:

Simply wire the heater to a fused spur / Cable Length 2m / Cable exit on the rear - hidden wiring / Fitting Kit Supplied / No need to manually switch heaters "On" or "Off" when using controller.

### WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

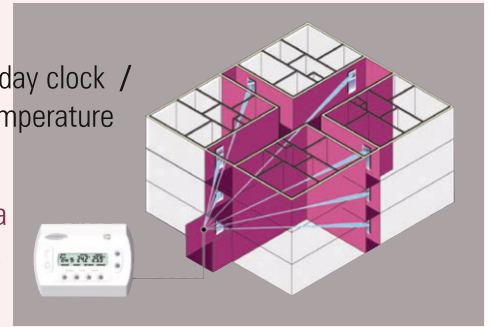

### RAL COLOUR OPTIONS

	RAL 9010 PURE WHITE		RAL 6019 PASTEL GREEN		RAL 7047 TELE GREY 4
	RAL 9001 CREAM		RAL 6034 PASTEL TURQUOISE		RAL 9005 WHITE ALUMINIUM
	RAL 1015 LIGHT IVORY		RAL 5015 SKY BLUE		RAL 7024 GRAPHITE GREY
	RAL 1014 IVORY		RAL 5002 ULTRAMARINE BLUE		RAL 7016 ANTHRACITE GREY
	RAL 7032 PEBBLE GREY		RAL 5008 GREY BLUE		RAL 9005 BLACK

To help preserve the environment, and as part of its sustainability policy, Ecolec Radiators offer a **Do Not Scrap** return-to-base full refit and refurbishment service.

### A simple 3 point plan!

**1. Measure Room Sizes    2. Calculate Heat Loss    3. Select Radiator**

*All local space heaters manufactured for sale in the EU after 1st January 2018 which use electricity, gaseous or liquid fuels, must comply with a minimum efficiency standard. This includes electric radiators, electric underfloor heating and electric and gas fires.*

 **PROUDLY MANUFACTURED IN THE UK**


**Power Switch**



**Light Switch**




**Side Wall - Heat Indicator**

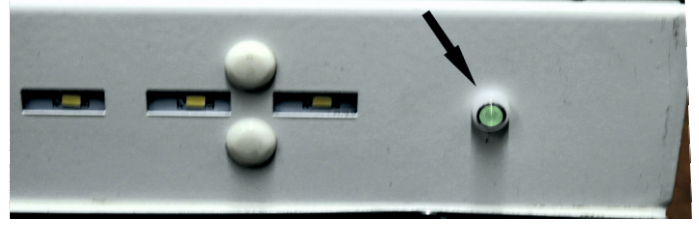


**SPECIFICATION:**

LINE REF	CODE	DIMENSIONS (H X W X D) MM	LED (WATTS)	ELEMENT (WATTS)	OUTPUT (WATTS)	OUTPUT (BTU'S)
<b>Powder Coated White</b>						
17.1	AUR 500D/PC/IP44/LED	500 x 500 x 44	10	500	300	1023
17.2	AUR 1000D/PC/IP44/LED	1000 x 500 x 44	20	1000	600	2046
17.3	AUR 1500D/PC/IP44/LED	1500 x 500 x 44	30	1500	900	3070
17.4	AUR 750D/SB/PC/IP44/LED	1500 x 250 x 44	30	750	450	2046

**DIAGRAM:**

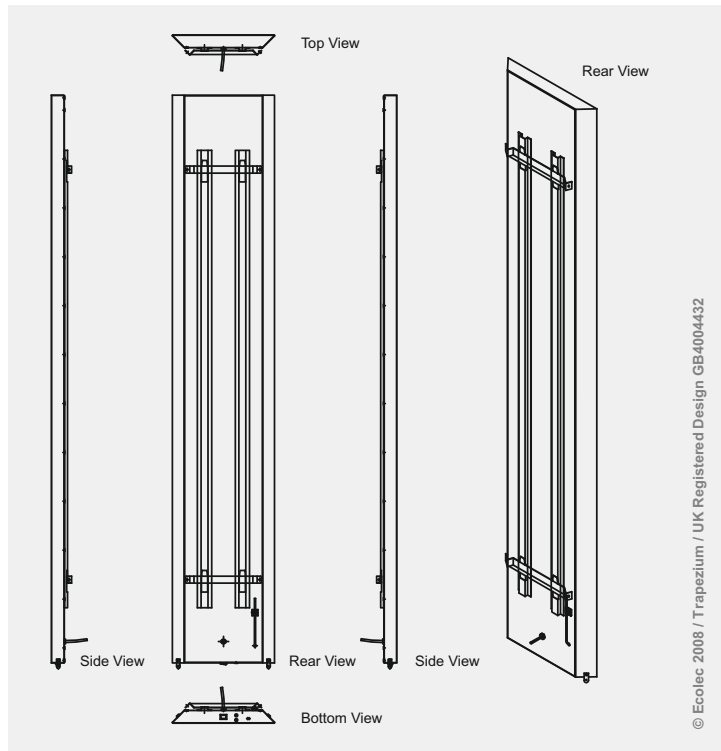

**TEMPERATURE RANGE: STANDARD 70°C**  
**Allow one hour**

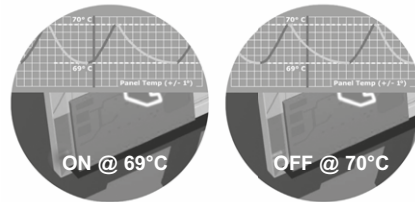

**Trapezium / UK Registered Design GB4004432**

Sharrocks Street, Wolverhampton WV1 3RP

Tel: **01902 457575** Email: **sales@ecolec.co.uk** Website: **www.ecolec.co.uk**



Hereby, Ecolec Limited, declares that the radio equipment type thermostat and gateway are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.ecolec.co.uk/support](http://www.ecolec.co.uk/support)

© Ecolec © Ecolec 1995-2024.  
 All rights reserved Ecolec is a registered trademark of Ecolec Limited All specifications subject to change without notice.



**Proudly  
 Manufactured  
 in the UK.**

**E & O. E.**