

Uniclass L7522	EPIC L22
CI/SFB (56.84)	X

Available from
electric wholesalers
and NICEIC
engineers

**Lot 20
compliant**



Wireless Heating Systems

SPACE SAVING IP44 **SAFE TO TOUCH** 55°C PANEL RADIATORS



For Offices, Homes, Apartments, Sheltered Housing, Assisted Living, Nurseries, School, Rest and Care Homes, Healthcare Buildings and Public Areas where potentially vulnerable people and children might be living, working or visiting.

Works with Wireless Time and Temperature Control

All local space heaters manufactured for sale in the EU after 1st January 2018 which use electricity, gaseous or liquid fuels, must comply with a minimum efficiency standard. This includes electric radiators, electric underfloor heating and electric and gas fires.



PROUDLY MANUFACTURED IN THE UK



THEME: PLAIN



A friendlier thermal comfort solution with better control.






RADIATOR (RECEIVER) KEY FEATURES:

Simply wire the heater to a fuse spur / Hidden wiring / No need to manually switch heaters "on" or "off"

WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/TX. Room air temperature sensor fitted inside.

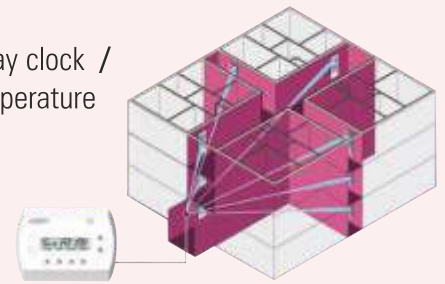

**Battery Kit wCT100
AIR SENSOR THERMOSTAT**



CONTROLLERS


MK1 230V Mains Kit



SPECIFICATION:

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	OUTPUT WATTS
Powder Coated White				
12.1	ECO 1000DLL/IP44/PC/RX/55	2000 x 500 x 40	1000	860
12.2	ECO 1000DL/IP44/PC/RX/55	1500 x 500 x 40	1000	642
12.3	ECO 500DLL/IP44/PC/RX/55	1000 x 500 x 40	500	425
12.4	ECO 500DL/IP44/PC/RX/55	750 x 500 x 40	500	321
12.5	ECO 250DLL/IP44/PC/RX/55	500 x 500 x 40	250	214
12.6	ECO 250DLL/SB/IP44/PC/RX/55	1000 x 250 x 40	250	214
12.7	ECO 500DL/SB/IP44/PC/RX/55	1500 x 250 x 40	500	321

**TEMPERATURE RANGE:
55°C (+/- 1°C)**

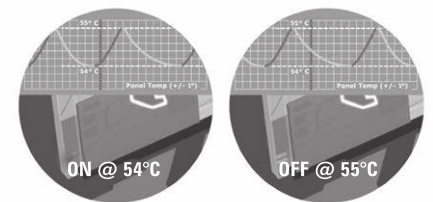

Selected Powder Coated RAL COLOURS available for additional charge

SAFE TO TOUCH AT 55°C

RAL COLOUR OPTIONS

	RAL 9010 PURE WHITE		RAL 6019 PASTEL GREEN		RAL 7047 TELE RGEY
	RAL 9001 CREAM		RAL 6034 PASTEL TURQUOISE		RAL 9006 WHITE ALUMINIUM
	RAL 1015 LIGHT IVORY		RAL 5015 SKY BLUE		RAL 7024 GRAPHITE GREY
	RAL 1014 IVORY		RAL 5002 ULTRAMARINE BLUE		RAL 7016 ANTHRACITE GREY
	RAL 7032 PEBBLE GREY		RAL 5008 GREY BLUE		RAL 9005 BLACK

NO PLUMBING, NO GUARDS, NO PIPEWORK, EASY PLUG AND PLAY INSTALLATION.

Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Email: sales@ecolec.co.uk Website: www.ecolec.co.uk



Hereby, Ecolec Limited, declares that the radio equipment type thermostat and gateway are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.ecolec.co.uk/support

© Ecolec © Ecolec 1995-2024. All rights reserved Ecolec is a registered trademark of Ecolec Limited All specifications subject to change without notice.



Proudly Manufactured in the UK.

E&O.E.