

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X

Available from  
electric wholesalers  
and NICEIC engineers

GO ELECTRIC WITH...



MADE IN THE UK  
Stay Safe, Stay Warm and  
Take Control of your Energy Savings

## PANEL RADIATORS WITH PHONE COMMUNICATION

- PRESET AT 70°C CLASSIC RANGE
- 43°C HSE HEALTHCARE RANGE
- 80°C CEILING RANGE

For Offices, Homes, Apartments, Schools, Churches, Social Housing, Buildings and Public Areas which require space heating.

Lot 20  
compliant



**ECOLEC ELECTRIC HEATERS HAVE TEAMED UP WITH THE DELTA DORE CONTROLS PLATFORM TO ALLOW THE HOME OWNER TO CREATE A SEAMLESS HOME AUTOMATION EXPERIENCE SHARING HEATING, LIGHTING, SECURITY, HOT WATER, UNDERFLOOR HEATING, GATE/GARAGE DOORS AND ROLLER SHUTTERS.**



MINOR 1000



Your Phone



ECO 1500D/IP44/PC/RZ/70



ECO 2000D/IP44/PC/RZ/70




ECO 500/80/FF/RP/PC/RZ  
TO FIT T5 CEILING GRID SYSTEM



# SUSPENDED & T5 CEILING GRID RADIANT PANEL HEATERS



ECO 1000/CE/RP/PC/RZ

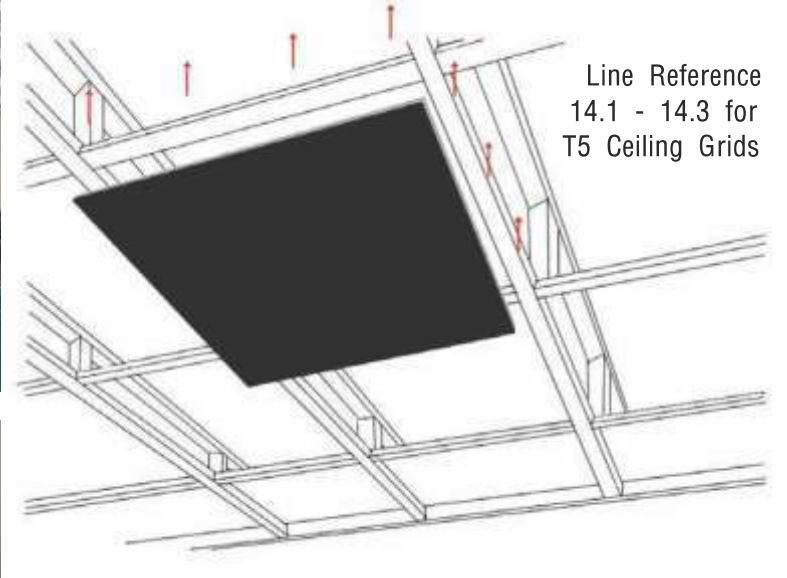

Line Reference  
14.1 - 14.3 for  
T5 Ceiling Grids



ECO 1000/CE/RP/PC/RZ



Receiver 6630 Delta Dore

Receiver 16A supplied contact wired output

The benefits of using RF 6630 :

Intuitive remote control and programming using the TYDOM application



MINOR 1000 Room Thermostat

Wireless zone thermostat for electric heating

The benefits of using MINOR 1000 :

Feedback providing remote information of room temperature in the home and kWh/hr display of running costs

Reduced size allowing discrete installation



TYDOM Home Gateway

IP home automation gateway for local or remote control with the TYDOM application

The benefits of using TYDOM Home :

Centralise and manage all your equipment at home : heating, alarm system, garage doors and gates, blinds, lights

A simple and user-friendly Tydom application to control remotely all your equipment

Free app without subscription.

Solution evolves over time with the connected ecosystem from Delta Dore and its partners linds.

## TYDOM Home Home Automation is accessible to all

TYDOM Home is a new generation of Home Automation solution that enables you to control your house, your second home or your office, locally or remotely, from your Smartphone or tablet.

Without subscription, each TYDOM Home solution includes a gateway and an application to control your connected devices wherever you are.

You can even make energy savings too.

### The gateway and the application

Alarm

Heating

Lighting

Openings



**RADIATORS CAN BE EITHER WIRED TO A FUSED SPUR OR FITTED WITH A PLUG.  
PLEASE ALWAYS CONSULT A QUALIFIED ELECTRICIAN.**

**RADIATOR KEY FEATURES:**

**RADIATORS MUST BE HARD-WIRED**

**Compatible with Nest, Hive, Honeywell, KNX, Raspberry Pi, Delta Dore and Prefect Controls**

**RADIANT PANEL HEATER SYSTEMS (DEPTH 40mm)**

**SURFACE TEMPERATURE RANGE: 70°C CLASSIC RANGE**

(CAN BE WALL MOUNTED VERTICALLY OR HORIZONTALLY)

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)	HEAT OUTPUT (WATTS)	AMPS
<b>Powder Coated White RAL 9016</b>					
25.1	ECO 2000D/IP44/PC/RZ/70	2000 x 500 x 40	2000	2000	10
25.2	ECO 1500D/IP44/PC/RZ/70	1500 x 500 x 40	1500	1500	10
25.3	ECO 1000D/IP44/PC/RZ/70	1000 x 500 x 40	1000	1000	5
25.4	ECO 750D/IP44/PC/RZ/70	750 x 500 x 40	750	750	5
25.5	ECO 500D/IP44/PC/RZ/70	500 x 500 x 40	500	500	3
Selected RAL colours (see chart)					

**SURFACE TEMPERATURE RANGE: 55°C SCHOOLS RANGE**

(CAN BE WALL MOUNTED VERTICALLY OR HORIZONTALLY)

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	HEAT OUTPUT (WATTS)	AMPS
<b>Powder Coated White RAL 9016</b>					
26.1	ECO 1000DLL/IP44/PC/RZ/55	2000 x 500 x 40	1000	860	5
26.2	ECO 1000DL/IP44/PC/RZ/55	1500 x 500 x 40	1000	642	5
26.3	ECO 500DLL/IP44/PC/RZ/55	1000 x 500 x 40	500	425	3
26.4	ECO 500DL/IP44/PC/RZ/55	750 x 500 x 40	500	321	3
26.5	ECO 250DLL/IP44/PC/RZ/55	500 x 500 x 40	250	214	3
Selected RAL colours (see chart)					

**SURFACE TEMPERATURE RANGE 43°C LST HEALTHCARE RANGE**

(CAN BE WALL MOUNTED VERTICALLY OR HORIZONTALLY)

LINE REF	CODE	DIMENSIONS (W X H X D)	ELEMENT (WATTS)	HEAT OUTPUT (WATTS)	AMPS
<b>Powder Coated White RAL 9016</b>					
27.1	ECO 1000DLL/IP44/PC/RZ/43	2000 x 500 x 40	1000	590	5
27.2	ECO 1000DL/IP44/PC/RZ/43	1500 x 500 x 40	1000	443	5
27.3	ECO 500DLL/IP44/PC/RZ/43	1000 x 500 x 40	500	295	3
27.4	ECO 500DL/IP44/PC/RZ/43	750 x 500 x 40	500	222	3
27.5	ECO 250DLL/IP44/PC/RZ/43	500 x 500 x 40	250	148	3
Selected RAL colours (see chart)					






**RADIANT CEILING HEATER SYSTEMS (DEPTH 40mm) Can be suspended apart from 28.1 to 28.3**

**SURFACE TEMPERATURE RANGE 80°C CEILING RANGE**

LINE REF	CODE	SYSTEM	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)	HEAT OUTPUT (WATTS)	AMPS
<b>Powder Coated White RAL 9016</b>						
28.1	ECO 500/80/FF/FP/PC/RZ	T5 Grid	595 x 595 x 40	500	500	3
28.2	ECO 750/80/FF/FP/PC/RZ	T5 Grid	1195 x 595 x 40	750	750	5
28.3	ECO 1000/80/FF/FP/PC/RZ	T5 Grid	1785 x 595 x 40	1000	1000	5
28.4	ECO 1000/CE/FP/PC/RZ	Suspended	2000 x 500 x 40	1000	1000	5
28.5	ECO 750/CE/FP/PC/RZ	Suspended	1500 x 500 x 40	750	750	5
28.6	ECO 500/CE/FP/PC/RZ	Suspended	1000 x 500 x 40	500	500	3
Selected RAL colours (see chart)						

## RAL COLOUR OPTIONS

	RAL 9010 PURE WHITE		RAL 6019 PASTEL GREEN		RAL 7047 TELE GREY
	RAL 9001 CREAM		RAL 6034 PASTEL TURQUOISE		RAL 9006 WHITE ALUMINIUM
	RAL 1015 LIGHT IVORY		RAL 5015 SKY BLUE		RAL 7024 GRAPHITE GREY
	RAL 1014 IVORY		RAL 5002 ULTRAMARINE BLUE		RAL 7016 ANTHRACITE GREY
	RAL 7032 PEBBLE GREY		RAL 5008 GREY BLUE		RAL 9005 BLACK

REFERENCE	NAME	DESCRIPTION	
<b>16.1</b>	<b>TYDOM Home</b>	<b>Smart Home GATEWAY</b>	
<b>16.2</b>	<b>RF 6630 Heater Receiver</b>	<b>16A 230V CONTACT RECEIVER WITH STRIP TERMINAL X3D</b>	
<b>16.3</b>	<b>MINOR 1000</b>	<b>WIRELESS ROOM THERMOSTAT X3D</b>	
<b>16.4</b>	<b>TYXIA 6410 Hot Water Receiver</b>	<b>WALL MOUNTED RECEIVER 1 DRY OUTPUT CONTACT 5 Amp</b>	
<b>16.5</b>	<b>MDO BL TYXAL+</b>	<b>WHITE MICRO OPENING DETECTOR</b>	

Sharrocks Street ,Wolverhampton WV1 3RP

Tel: 01902 457575 Email: [sales@ecolec.co.uk](mailto:sales@ecolec.co.uk) Website: [www.ecolec.co.uk](http://www.ecolec.co.uk)



Hereby, Ecolec Limited, declares that the radio equipment type thermostat and gateway are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.ecolec.co.uk/support](http://www.ecolec.co.uk/support)

© Ecolec © Ecolec 1995-2024.  
All rights reserved Ecolec is a registered trademark of Ecolec Limited All specifications subject to change without notice.





**Radiators  
Proudly  
Manufactured  
in the UK.**

E & O. E.



# Electric Water Heating Connection with 3 radiators


Lot 20  
compliant

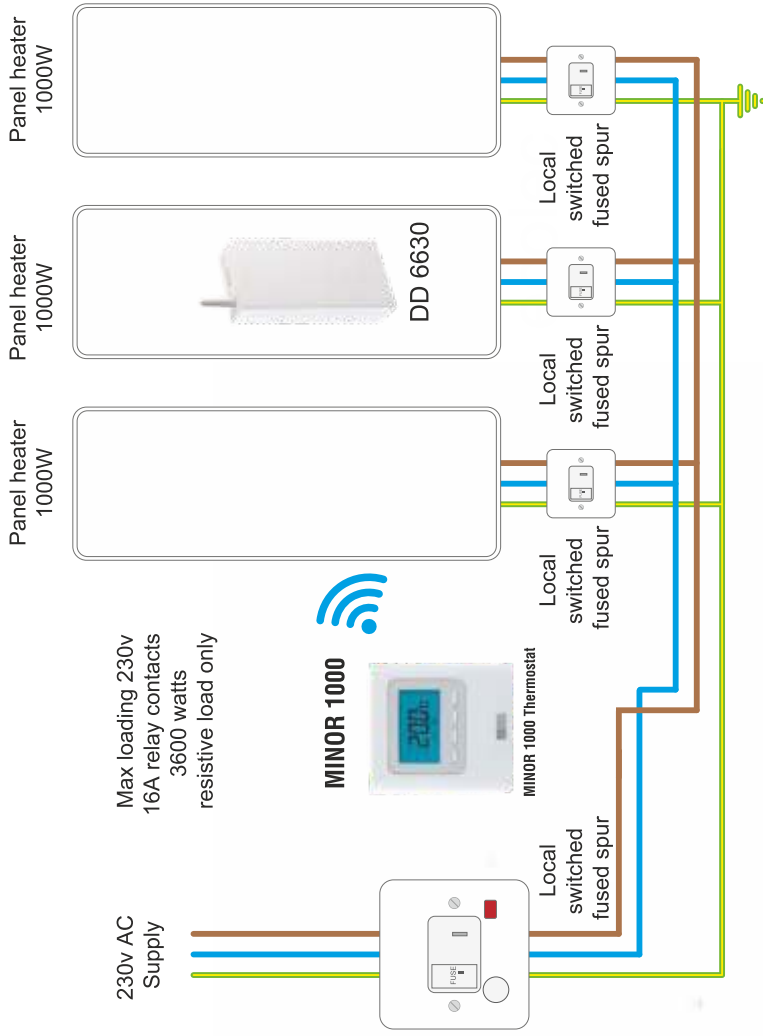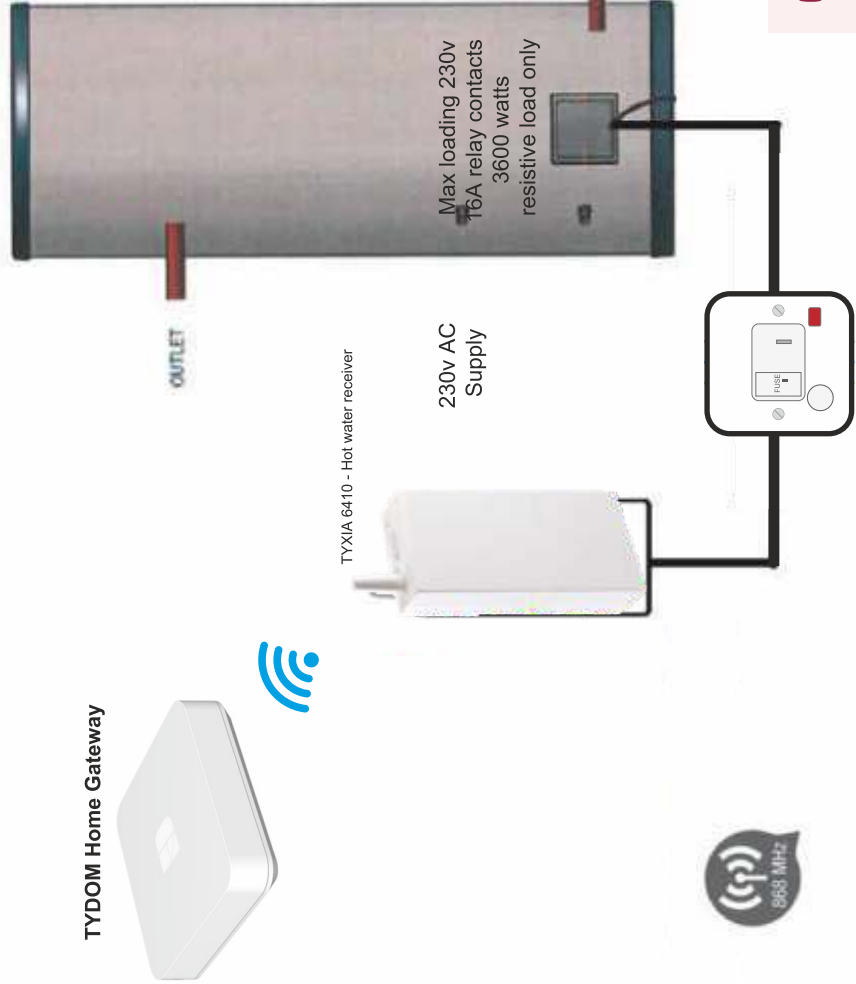

Max loading 230v 16A relay contacts 3600 watts resistive load only

For example see below

- 3x ECO 1000D/IP44/PC/RZ/I70, or,
- 1x ECO 2000D/IP44/PC/RZ/I70
- 2x ECO 1500D/IP44/PC/RZ/I70
- 3x ECO 1000D/IP44/PC/RZ/I70
- 4x ECO 750D/IP44/PC/RZ/I70
- 6x ECO 500D/IP44/PC/RZ/I70

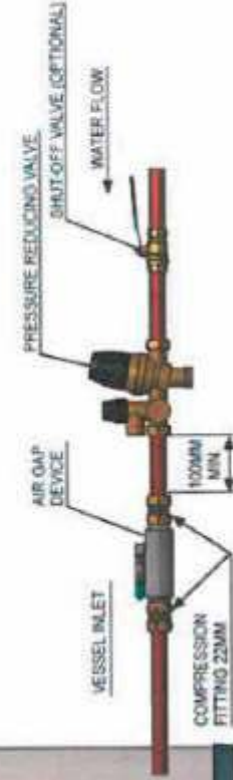

**CONSULT A QUALIFIED ELECTRICIAN IF YOU NEED GUIDANCE REGARDING THE SAFE CONNECTION OF ANY OF THE EQUIPMENT BEING INSTALLED.**